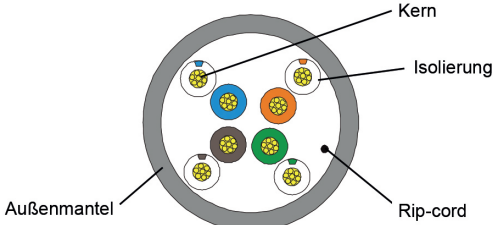


## Cat5e - UTP - FLEXIBEL - PVC

Kategorie	U/UTP CAT5E-4P-PVC					
Referenz	ISO/IEC 11801 TIA-568-C.2					
CPR Klasse	Fca					
Kern	Flexibel - 100% Kupfer					
Schirmung	UTP	Technische Leistung (<30m):				
AWG	26	Frequenz (Mhz)	RL ≥dB	ATT ≤dB	NEXT ≥dB	Phase DELAY ≤ns
Durchmesser Kabel	4,7 mm	1	19.0	3.0	60.0	521
Länge	100m	4.0	19.0	3.9	54.8	504
Bandbreite	100.0 MHz	8.0	19.0	5.5	50.0	500
Biegeradius	8x Durchmesser Kabel	10.0	19.0	6.2	48.5	498
Maximale Ziehkraft (Mpa)	≥ 12.5	16.0	19.0	7.9	45.2	496
Material Außenmantel	PVC	20.0	19.0	8.9	43.7	495
Farbe Außenmantel	Grau	25.0	18.0	10.0	42.1	495
Aderfarben	1 - Blau/ Weiß-Blau	31.25	17.1	11.2	40.5	494
	2 - Orange/ Weiß-Orange	62.5	14.1	16.2	35.7	492
	3 - Grün/ Weiß-Grün	100	12.0	21.0	32.3	491
	4 - Braun/ Weiß-Braun	Frequenz (Mhz)	PSNEXT ≥dB	ELFEXT ≤dB	PSELFEXT ≥dB	
Rip-cord	Integriert	1	57.0	58.6	55.6	
Verpackung	Abrollkarton	4.0	51.8	46.6	43.6	
		8.0	47.0	40.6	37.5	
		10.0	45.5	38.6	35.6	
		16.0	42.2	34.5	31.5	
		20.0	40.7	32.6	29.6	
		25.0	39.1	30.7	37.7	
		31.25	37.5	28.7	25.7	
		62.5	32.7	22.7	19.7	
		100	29.3	18.6	15.6	